

BEKOTAŞ GOLD PURE ACRYLIC ELASTOMERIC THICK SLIDING ISOLATION



Application Recommendations

Application Areas

- In exterior, can be used prepared surfaces such as in accordance mortar, concrete, cement, boards, gypsum panel.

Equipment



Fillers



Gypsum Undercoat



Acrylic Putty



Exterior Undercoat



Liquid Membrane

Equipment



Scraper



Gypsum trowel



Putty shovel



Spatula



Trowel



Dust Cloth



Brush



Mixer



Adjustable Stick



Paint Bucket

Surface Preparation



Mortar



Concrete



Cement Board



Gypsum Panels



Old Plastic Paint



Plaster Board



Glasstextile



Wallpaper


- Gold Liquid Membrane applicable cleaned every dirt, oil, dry and solid of the swollen layers. Can obtain maximum benefit from the Gold Liquid Membrane, must be removed from accordance mortar, raw concrete, cement gypsum board and made ceiling paint, dirt, dust and adhesion surfaces. Should be cleaned worm, swollen, completely perforated plate of paints.

- If there is not particular a new object to be painted like grain mortar, concrete, cement must be smoothed with satin plaster

- If necessary, surface cracks should be filled with putty and defects should be corrected.

- Application surfaces should be degreased from old plastic or synthetic paint, glass textiles, wallpaper and coated surfaces adhesion of dust, dirt and completely cleaned dry old and swollen layer should be made sound and clean.

- Old painted moldy surfaces before application on the surface should be cleaned with damp cloth. Thoroughly with emery paper, the surface must be removed. If soot and mold drying preemptive 2-3 coats should be applied.

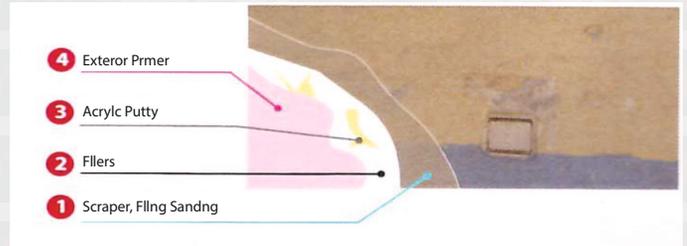

Application



During application and during the subsequent 24 hours at the ambient temperature of the surface should be +5 ° C.



Before application Gold Liquid Membrane should be mixed.



Gold Liquid Membrane thinned with clean water 10% and application for two layer by brush, roller or spray.



Should be waited minimum 6 hours between layers.

After Application

Application tools should be washed with water after use immediately.

BEKOTAŞ GOLD PURE ACRYLIC ELASTOMERIC THICK SLIDING ISOLATION



Isolation

Exterior

Water

Product Code: 400

Product Description

It has outstanding properties of existing materials used for waterproofing. When dry it creates a sturdy elastic coating with waterproof and seamless. It is white liquid membrane waterproofing material with longevity. When dry it creates a sturdy elastic coating with waterproof, seamless. Can be colored, over with only water based paints have same elasticity structure.

Application Areas

Can be used to concrete, plaster, brick, tile, aerated concrete, corrugated or non-corrugated, roof sheeting in building with wood and terraces, window sills, drips, pools, cisterns, water tanks, moisture and water impermeability structure and place.

Advantages

- Gold liquid is absolutely waterproof. Gold liquid membrane does not contain solvent and asphalt.
- Application is very very simple and semi-fluid, thus can be easily coated very hard surfaces.
- Excellent adhesion to all kinds of building materials. (mineral-based surface adhesion strength: 7.15kgf / cm²).
- Allows breathing at the surface. (water vapor permeability: 24 h at 23 °C at 65% humidity 27.6 g / m² day)
- Tensile strength after 24 hours at 23 °C. 24.5kgf / cm² after 72 hours 55kgf / cm². Bacteria will not grow on the material thanks to biocides.
- Dekorative. As white produced can be colored. Can be painted with water-based paints only with the same elasticity structure.



Matt



Brush



Roll



Spray Pistle

Technical specifications:

Structure

Acrylic emulsion based, water based

Diluting

Water

Appearance on the packing

Dark, Stable, Jelly

Dry Appearance

Bright, Smooth.

Color

White

Water Vapor permeability

SD (m) (TS EN ISO 7783-2):
Approximately: 100

Drying Time

(between +5 +35 °C) starting time to second layer is 6 hours, completely drying time 24 hours. Ossification time is one week. Lower temperature and high relative humidity extends the drying time.

Coverage

Depending on the surface smoothness and absorbency approximately 2,5-3,3 m²/lt. per a layer.

Shelf Life

In package and in 5-35 °C 2 years

Packing

20 - 10 ve 3,5 kg'lık plastic bucket.

Safety Recommendations

- S2: Keep out the reach of children.
- S24/25: Avoid contact with eyes and skin.
- S26: In case of contact with eyes immediately wash with water and contact with a doctor.
- S28: In case of contact with skin immediately wash with water.
- S29: Do not discharge into drains or water courses.
- S46: If swallowed, seek medical advice immediately and show the container or label. Mix before using. Close the cover after using. Protect from frost and direct sunlight.



Quality Certificate

- TS 5808
Public exposure No. 04.524/604.506/E3