

SUMONT WATER PROOFING EMPERIE MATERIAL



Isolation

Exterior

Solvent

Application Recommendations

Application Areas

- Can used wet and damp walls
- Damp painted or unpainted walls
- Subbasments,interior walls and exterior walls.
- Wall of basement.
- Floors,concrete,screed and such as surfaces.
- In tunnels on the northern façade of the building.
- Resulting in mold and mildew from walls etc. Many moisture and the moisture problem.

Equipment



Fillers



Gypsum Undercoat



Acrylic Putty



Interior Undercoat



Sumont

Equipment



Scraper



Gypsum trowel



Putty shovel



Spatula



Trowel



Dust Cloth



Brush



Mixer



Adjustable Stick



Paint Bucket




Sprayer

Surface Preparation



Mortar




Concrete



Cement Board



Gypsum Panels



Old Plastic Paint



Plaster Board



Glasstextile



Wallpaper

• Is ready to use the Sumont insulation materials. The application surface can be wet, damp, dank, moldy, or dry. However, these surfaces are first cleaned, application should be made after drying the area with sumont.

• Can be applied to painted, unpainted any surfaces. Must be cleaned only if they are surging parts painted surfaces. Opening Sumont insulation materials and packaging must be mixed for 3 minutes.


• After mixing is complete should be applied prior to the first floor existing surface by brush spray or aid of roller.

• Must wait 24 hours after the first coat and the second coat should be applied.

• Necessarily a good ventilation of the application should be made

attractions, while application masks, gloves and goggles should be used.

Application



During application and during the subsequent 24 hours at the ambient temperature of the surface should be +5 ° C.



Before application Sumont Water Proofing Empire Material should be mixed.




Sumont Water Proofing Empire Material thinned with clean water 10% and application for two layer by brush, roller or spray.



Should be waited minimum 6 hours between layers.

After Application

Application tools should be washed with water after use immediately.

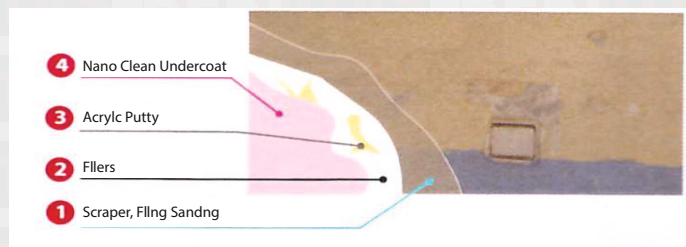

SUMONT

WATER PROOFING

EMPERIE MATERIAL



Isolation

Exterior

Solvent

Product Code: 390

Product Description

- For removal of moisture and humidity problems that occur in the natural conditions of the inner and outer walls of the building is made of specialty chemicals and polymers and modified with a very strong insulation.

Application Areas

- Can be applied to painted,unpainted,-damp,dry all kind of surfaces.Excellent alkali and the formation of mold and m'ldew resistance through walls.
- All kinds of surface adhesion strength is extremely powerful, never get up, does not swell, resistance to chemicals is pretty good.Not affected by dust,rain,water and UV.Used moisture,garage,cellar,under waterlogged,basement and both interior and exterior walls.

Advantages

- Paint the walls damp or even wet surfaces, even if it dries quickly and provides insulation clinging tight.
- Not affected by salt water and salt efflorescence. Thanks to this feature of the building is also used to solve the problem subbasements paint blistering.

Sumont Coat the surface water at the same time creating an impermeable layer dries moisture from the inside thanks to special chemicals by manipulating the structure of the wall.

Sumont insulating material has no side effects. Therefore, application of chemical damage to the surface or material will not be made.



Matt



Brush



Roll



Spray Pistole

Technical specifications:

Structure

- Acrylic emulsion based, water based

Diluting

- Water

Appearance on the packing

- Thin, Unstable, Transparant

Dry Appearance

- Matt, Pastel, Smooth

Color

- Transparant

Water Vapor permeability

- SD (m) (TS EN ISO 7783-2): Approximately: 50

Drying Time

- (between +5 +35 °C) starting time to las layer is 6 hours. Lower temperature or high relative humidity lenghtens the drying time.

Coverage

- Depending on the surface smoothness and absorbency approximately 0,15-1,20 m²/lt. per a layer.

Shelf Life

- In package and in 5-35 °C 2 years

Packing

- 1 and 3 kg plastic bucket.

Safety Recommendations

- S2: Keep out the reach of children.
- S24/25: Avoid contact with eyes and skin.
- S26: In case of contact with eyes immediately wash with water and contact with a doctor.
- S28: In case of contact with skin immediately wash with water.
- S29: Do not discharge into drains or water courses.
- S46: If swallowed, seek medical advice immediately and show the container or label. Mix before using. Close the cover after using. Protect from frost and direct sunlight.

Quality Certificate

- TS 5808
Public exposure No. 04.524/604.506/E3

