

NANO CLEAN Matt Ceiling Paint



Application Recommendations

Application Areas

- In interior; prepared in accordance mortar, concrete, cement board new ceiling and old ceiling.

Equipment



Fillers



Gypsum Undercoat



Acrylic Putty



Nano Clean Interior Undercoat



Nano Clean Interior Paint

Equipment



Scraper



Gypsum trowel



Putty shovel



Spatula



Trowel



Dust Cloth



Brush



Mixer



Adjustable Stick



Paint Bucket



Sprayer

Surface Preparation



Mortar



Concrete



Cement Board




Gypsum Panels



Old Plastic Paint

- Nano Clean Matt Ceiling applicable cleaned every dirt, oil, dry and solid of the swollen layers. Can obtain maximum benefit from the Nano Clean Matt Ceiling, must be removed from accordance mortar, raw concrete, cement gypsum board and made ceiling paint, dirt, dust and adhesion surfaces. Should be cleaned worm, swollen, completely perforated plate of paints.
- If there is not particular a new object to be painted like grain mortar, concrete, cement must be smoothed with satin plaster.
- If necessary, surface cracks should be filled with putty and defects should be corrected.
- Best way to take advantage from Nano Clean Matt Ceiling after making all surfaces smooth to apply. Nano Clean Interior Undercoat will reduce consumption and ensure good adhesion.
- Old painted moldy surfaces before application on the surface should be cleaned with damp cloth. Thoroughly with emery paper, the surface must be removed. If soot and mold drying preemptive

2-3 coats should be applied.

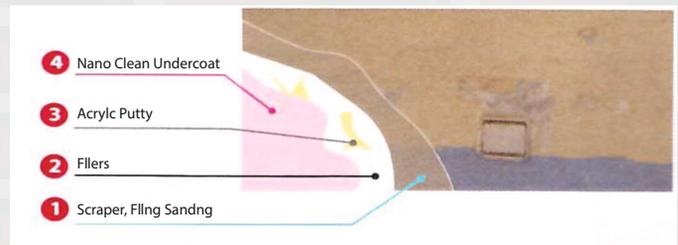

Application



During application and during the subsequent 24 hours at the ambient temperature of the surface should be +5 ° C.



Before application Nano Clean Matt Ceiling Paint should be mixed.



Nano Clean Matt Ceiling thinned with clean water 10% and application for two layer by brush, roller or spray.



Should be waited minimum 6 hours between layers.

After Application

Application tools should be washed with water after use immediately.

NANO CLEAN

Matt Celing Paint



Interior

Water

Product Code 10

Product Descrpton


- It is decorative mat ceiling undercoat paint, acrylic emulsion based, photocatalytic (self-cleaning with light) resistant to mildew and algae.

Applcaton Areas

- In interior surfaces, such as mortar, concrete, cement, boards, gypsum panel.
- Old painted surfaces.

Advantages

- Cigarette smoke, heat and odors by breaking down harmful substance such as heat destroy activate light transported by air to the ceiling surface thanks photocatalytic.
- Showing resistance to mold and fungus; provides relief especially for asthmatics.
- Indelible and easily cleaned.
- It has superior cover power.
- It is excellent water vapor permeability
- Does not harm health of enviroment and not smell because solvent free and diluted with water.

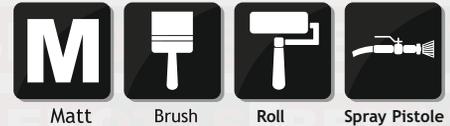

Technical specifications:

Structure

- Acrylic emulsion based, water based

Diluting

- Water

Appearance on the packing

- Dark, Stable, Jelly

Dry Appearance

- Matt, Pastel, Smooth

Color

- White

Drying Time

- Drying time 6 hours for 2. Layer. Full dry 24 hours.
- Low temperature and higher relative humidity will lengthen the drying time.

Coverage

- It depending surfaces smoothness and absorbency for one layer 0,060 lt./m2.

Shelf Life

- 2 year for 5-35°C on packing

Packing

- 20 - 10 and 3,5kg plastic bucket.
- 3.5 kg bucket in the 4 point package.

Safety Recommendations

- S2 Keep out of the reach of children.
- S24/25 Avoid contact with eyes and skin.
- S26 In case of contact with eyes immediately wash with water and contact with doctor
- S28 In case of contact with skin immediately wash with water.
- S29 Do not discharge into drain or water courses.
- S46 If swallowed, seek medical advice immediately, and show the container or label.
- Mixing before using.
- Close cover after using. Protect from frost and direct sunlight.

Quality Certificate

- TS 5808
- Public exposure No. 04.524/604.506/E3

