

NANO WASH EXTERIOR UNDERCOAT



Exterior

Water

Application Recommendations

Application Areas

- It is exterior undercoat, acrylic emulsion based, photocatalytic (self-cleaning with light) resistant to mildew and algae.

Equipment



Fillers



Gypsum Undercoat



Acrylic Putty



Nano Wash Matt Exterior Undercoat

Equipment



Scraper



Gypsum trowel



Putty shovel



Spatula



Trowel



Dust Cloth



Brush



Mixer



Adjustable Stick



Paint Bucket



Sprayer


Surface Preparation



Mortar



Concrete



Cement Board




Gypsum Panels




Old Plastic Paint

- Nano Wash Exterior Undercoat applicable cleaned every dirt, oil, dry and solid of the swollen layers. Can obtain maximum benefit from the Nano Wash Exterior Undercoat, must be removed from accordance mortar, raw concrete, cement gypsum board and made ceiling paint, dirt, dust and adhesion surfaces. Should be cleaned worm, swollen, completely perforated plate of paints.
- If there is not particular a new object to be painted like grain mortar, concrete, cement must be smoothed with satin plaster
- If necessary, surface cracks should be filled with putty and defects should be corrected.
- Old painted moldy surfaces before application on the surface should be cleaned with damp cloth. Thoroughly with emery paper, the surface must be removed. If soot and mold drying preemptive 2-3 coats should be applied.

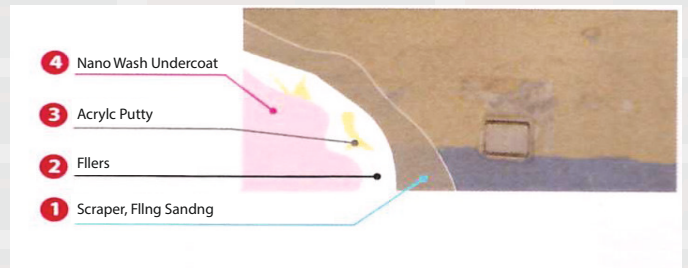

Application



During application and during the subsequent 24 hours at the ambient temperature of the surface should be +5 ° C.



Before application Nano Wash Exterior Undercoat should be mixed.



Nano Wash Exterior Undercoat thinned with clean water 10% and application for two layer by brush, roller or spray.



Should be waited minimum 6 hours between layers.

After Application

Application tools should be washed with water after use immediately.

NANO WASH EXTERIOR UNDERCOAT



Exterior

Water

Product Code 25

Product Description

- It is decorative exterior paint, acrylic emulsion based, photocatalytic (self-cleaning with light) resistant to mildew and algae.

Application Areas

- In interior, prepared in accordance mortar, concrete, cement, boards, gypsum panel surfaces such as
- Old painted surfaces.

Advantages

- Thanks to light-activated photocatalyst in also destroy the harmful substance and odors. Thus, cleans walls and keep walls clean for a long time.
- Showing resistance to mold and fungus; provides relief especially for asthmatics.
- Indelible and easily cleaned.
- It has superior cover power.
- Repels water due to contain silicone, hitting the facade of rainwater, allows to slide away without wetting the surface.
- High water vapor permeability and water vapor thrown away without wetting allows the building to breathe.
- Not affected severe weather conditions like rain, snow, humidity and such as extreme cold or hot.
- Resistant for alkali.



Matt



Brush



Roll



Spray Pistol

Technical specifications:

Structure

- Acrylic emulsion based, water based

Diluting

- Water

Appearance on the packaging

- Dark, Stable, Jelly

Dry Appearance

- Matt, Pastel, Smooth

Color

- In stock white. Custom manufacturing for any orders.

Water Vapor permeability

- SD (m) (TS EN ISO 7783-2) Approximately 0,250

Drying Time

- Drying time 6 hours for 2 layer. Full dry 24 hours. Lower temperature and higher relative humidity will lengthen drying time.

Coverage

- Depending on the surface smoothness and absorbency approximately 12-16 m²/lt. per a layer.

Shelf Life

- In package and in 5-35 °C 2 years

Packing

- 25 - 10 and 3,5kg plastic bucket.

Safety Recommendations

- S2: Keep out the reach of children. S24/25: Avoid contact with eyes and skin. S26: In case of contact with eyes immediately wash with water and contact with a doctor. S28: In case of contact with skin immediately wash with water. S29: Do not discharge into drains or water courses. S46: If swallowed, seek medical advice immediately and show the container or label. Mix before using. Close the cover after using. Protect from frost and direct sunlight.

Quality Certificate

- TS 5808
Public exposure No. 04.524/604.506/E3

