

# GOLD TEXTURED GRAINY MURTEX



## Application Recommendations

### Application Areas

- All facade of buildings, mortar, concrete and cement surfaces, inner surface with undercoat for decorative purposes.

## Equipment



Fillers



Gypsum Undercoat



Acrylic Putty



Exterior Undercoat



Gold Murtex Paint

## Equipment



Scraper



Gypsum trowel



Putty shovel



Spatula



Trowel



Dust Cloth



Brush



Mixer



Adjustable Stick



Paint Bucket




Sprayer


## Surface Preparation



Mortar



Concrete



Cement Board



Gypsum Panels



Old Plastic Paint



Plaster Board




Glasstextile




Wallpaper

- Application surfaces must be removed from all kind of dirt, oil, dust and completely cleaned old and blistered paint. Should be made dry, clean and solid.
- New or previously painted surfaces can be priming with Gold Exterior Undercoat and can get better results Murtex diluted with clean water 30% by volume of the undercoat itself be substituted.
- It is recommended to use in the same color with the selected color.
- Can be applied with Veratex roller and spray method.
- If you want thick application Veratex should be applied undiluted before application.
- It is recommended for thick desired application, maximum of 10% volume should be diluted with clean water. Two coat application minimum to be expected between 4 or 6 hours.

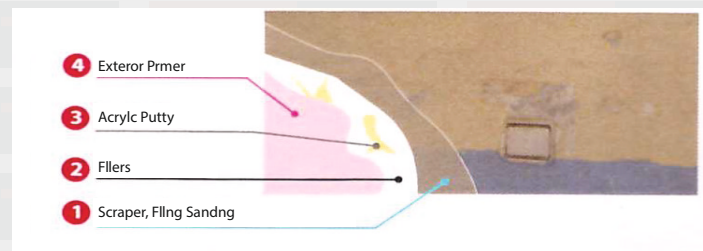

## Application



During application and during the subsequent 24 hours at the ambient temperature of the surface should be +5 ° C.



Before application Gold Textured Grainy Murtex should be mixed.



Gold Textured Grainy Murtex thinned with clean water 10% and application for two layer by brush, roller or spray.



Should be waited minimum 6 hours between layers.

## After Application

Application tools should be washed with water after use immediately.

# GOLD TEXTURED GRAINY MURTEX



Exterior

Water

Product Code: 190

## Product Description

- ◆ It is acrylic emulsion, elastomeric and long-lived decorative exterior coating.

## Application Areas

- ◆ All facade of buildings, mortar, concrete and cement surfaces can be used inner surface with undercoat for decorative purposes.

## Advantages

- ◆ High water vapor permeability and water vapor thrown away without wetting allows the building to breathe.
- ◆ Not affected severe weather conditions like rain, snow, humidity and such as extreme cold or hot.
- ◆ It has superior cover power.
- ◆ Is resistant to alkaline.
- ◆ Does not harm health of environment and not smell because solvent free and diluted with water.



Matt



Brush



Roll

## Technical specifications:

### Structure

- ◆ Acrylic emulsion based, water based

### Diluting

- ◆ Water

### Appearance on the packing

- ◆ Dark, Stable, Jelly

### Dry Appearance

- ◆ Matt, Pastel, Rough

### Color

- ◆ In stock white. Custom manufacturing for any orders.

### Water Vapor permeability

- ◆ SD (m) (TS EN ISO 7783-2): approximately: 100

### Drying Time

- ◆ (between +5 +35 °C) complete drying time is 24 hours. Ossification time is one week. Lower temperature or high relative humidity lengthens the drying time.

### Coverage

- ◆ Depending on the surface smoothness, absorbency, crack depth and pattern size approximately 2-2,5 m<sup>2</sup>/lt.

### Shelf Life

- ◆ In package and in 5-35 °C 2 years

### Packing

- ◆ 25 kg plastic bucket.

### Safety Recommendations

- ◆ S2: Keep out the reach of children.
- ◆ S24/25: Avoid contact with eyes and skin.
- ◆ S26: In case of contact with eyes immediately wash with water and contact with a doctor.
- ◆ S28: In case of contact with skin immediately wash with water.
- ◆ S29: Do not discharge into drains or water courses.
- ◆ S46: If swallowed, seek medical advice immediately and show the container or label. Mix before using. Close the cover after using. Protect from frost and direct sunlight.

### Quality Certificate

- ◆ TSE TS 7847  
Public exposure No. 04.524/604.506/E3

