

GOLD TEXTURED GRAINY RULOTEX SILICONE



Application Recommendation

Application Areas

- All facade of buildings, mortar, concrete and cement surfaces can be used inner surface with undercoat for decorative purposes.

Equipment



Fillers



Gypsum Undercoat



Acrylic Putty



Exterior Undercoat



Gold Rulotex Paint

Equipment



Scraper



Gypsum trowel



Putty shovel



Spatula



Trowel



Dust Cloth



Brush



Mixer



Adjustable Stick



Paint Bucket



Sprayer

Surface Preparation



Mortar



Concrete



Cement Board



Gypsum Panels



Old Plastic Paint



Plaster Board



Glasstextile




Wallpaper

- Application surfaces must be removed from all kind of dirt, oil, dust and completely cleaned old and blistered paint. Should be made dry, clean and solid.

- New or previously painted surfaces can be priming with Gold Exterior Undercoat and can get better results Rulotex diluted with clean water 30% by volume of the undercoat itself be substituted.

- It is recommended to use in the same color with the selected color
- Can be applied with Rulotex roller and spray method.

- If you want thick application Rulotex should be applied undiluted before application. It is recommended for thick desired application, maximum of 10% volume should be diluted with clean water. Two coat application minimum to be expected between 4 or 6 hours.

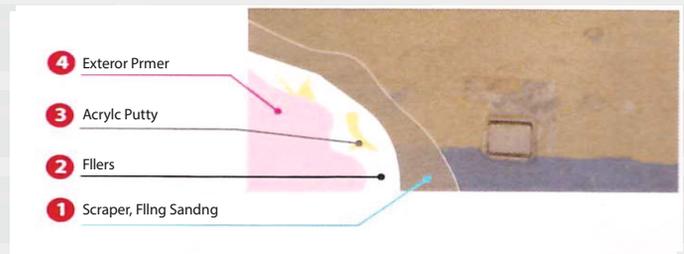

Application



During application and during the subsequent 24 hours at the ambient temperature of the surface should be +5 ° C.



Before application Gold Textured Grainy Rulotex should be mixed.



Gold Textured Grainy Rulotex thinned with clean water 10% and application for two layer by brush, roller or spray.



Should be waited minimum 6 hours between layers.

After Application

Application tools should be washed with water after use immediately.

GOLD TEXTURED GRAINY RULOTEX SILICONE



Exterior

Water

Product Code: 180

Product Description

- ◆ It is decorative exterior coating acrylic emulsion, elastomeric and long-lived.

Application Areas

- ◆ All facade of buildings, mortar, concrete and cement surfaces can be used inner surface with undercoat for decorative purposes.

Advantages

- ◆ High water vapor permeability and water vapor thrown away without wetting allows the building to breathe.
- ◆ Not affected severe weather conditions like rain, snow, humidity and such as extreme cold or hot.
- ◆ It has superior cover power.
- ◆ Is resistant to alkaline.
- ◆ Does not harm health of environment and not smell because solvent free and diluted with water.



Matt



Brush



Roll

Technical specifications:

Structure

- ◆ Acrylic emulsion based, water based

Diluting

- ◆ Water

Appearance on the packing

- ◆ Dark, Stable, Jelly

Dry Appearance

- ◆ Matt, Pastel, Rough

Color

- ◆ In stock white. Custom manufacturing for any orders.

Water Vapor permeability

- ◆ SD (m) (TS EN ISO 7783-2): approximately: 100

Drying Time

- ◆ (between +5 +35 °C) complete drying time is 24 hours. Ossification time is one week. Lower temperature or high relative humidity lengthens the drying time.

Coverage

- ◆ Depending on the surface smoothness, absorbency, crack depth and pattern size approximately 1,5 - 2 m²/lt.



Shelf Life

- ◆ In package and in 5-35 °C 2 years

Packing

- ◆ 25 kg plastic bucket.

Safety Recommendations

- ◆ S2: Keep out the reach of children.
- ◆ S24/25: Avoid contact with eyes and skin.
- ◆ S26: In case of contact with eyes immediately wash with water and contact with a doctor.
- ◆ S28: In case of contact with skin immediately wash with water.
- ◆ S29: Do not discharge into drains or water courses.
- ◆ S46: If swallowed, seek medical advice immediately and show the container or label.
- ◆ Mix before using. Close the cover after using.
- ◆ Protect from frost and direct sunlight.

Quality Certificate

- ◆ TSE TS 5808
Public exposure No. 04.524/604.506/E3