

# GOLD TRANSFER Undercoat



## Application Recommendations

### Application Areas

• Solvent-based paint on the desired changes done by applying water-based interior paint primer when used as a transition. Also all kinds of concrete, gas concrete, brick, plaster and similar mineral surfaces before application used as a primer coat on interior products.

## Equipment



Fillers



Gypsum Undercoat



Acrylic Putty



Interior Undercoat



Gold Transfer Undercoat

## Equipment



Scraper



Gypsum trowel



Putty shovel



Spatula



Trowel



Dust Cloth



Brush



Mixer



Adjustable Stick



Paint Bucket




Sprayer


## Surface Preparation



Mortar



Concrete



Cement Board



Gypsum Panels



Old Plastic Paint



Plaster Board



Glasstextile




Wallpaper

• **Gold Transfer Undercoat:** applicable cleaned every dirt, oil, dry and solid of the swollen layers. Can obtain maximum benefit from the Gold Transfer Undercoat must be removed from accordance mortar, raw concrete, cement gypsum board and made ceiling paint, dirt, dust and adhesion surfaces. Should be cleaned worm, swollen, completely perforated plate of paints.


• If there is not particular a new object to be painted like grain mortar, concrete, cement must be smoothed with satin plaster.

• If necessary, surface cracks should be filled with putty and defects should be corrected.

• Before applying bloated, flabby and unhealthy-looking surfaces should be scraped, sanded lightly grease and dirt removed the old synthetic surface painted surfaces. Volume thinned with 10% water Transition Primer is applied by brush or roller in a single layer.

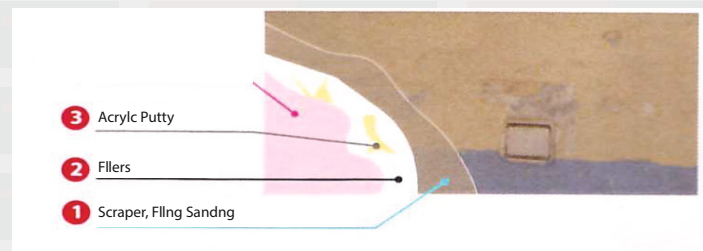

## Application



During application and during the subsequent 24 hours at the ambient temperature of the surface should be +5 ° C.



Before application Gold Transfer Undercoat should be mixed.



Gold Transfer Undercoat thinned with clean water 10% and application for two layer by brush, roller or spray.



Should be waited minimum 6 hours between layers.

## After Application

Application tools should be washed with water after use immediately.

# GOLD TRANSFER Undercoat



Exterior

Interior

Water

Product Code: 125

## Product Description

- White transfer undercoat used to switch the oil painting to water based paint. Painted with solvent-based satin paint on the old surface will be used in water-based satin paint application. Provides good adhesion of the new paint film through to the solvent based water base coating film. It is also applicable on the water-based surfaces. Provides the final layer to be more opaque water-based satin paint.

## Application Areas

- Used as application before topcoat, corrected with putty surfaces, emulsion based on previously painted surfaces, very absorbent and dust on surfaces that will be painted for the first time.

## Advantages

- Gold Transfer Undercoat penetration due to the nature of the substrate to penetrate deep into the interior of the next layer of paint on the application surface and creates a solid foundation by integrating.
- It is excellent water vapor permeability.
- Does not harm health of environment and not smell because solvent free and diluted with water.



Matt



Brush



Roll



Spray Pistolet

## Technical specifications:

### Structure

- Acrylic emulsion based, water based

### Diluting

- Water

### Appearance on the packing

- Dark, Stable, Jelly

### Dry Appearance

- Matt, Pastel, Smooth

### Color

- White

### Water Vapor permeability

- SD (m) (TS EN ISO 7783-2): approximately: 220

### Drying Time

- (between +5 +35 °C) starting time to last layer is 6 hours. Lower temperature or high relative humidity lengthens the drying time.

### Coverage

- Depending on the surface smoothness and absorbency approximately 5-6 m<sup>2</sup>/lt. per a layer.

### Shelf Life

- In package and in 5-35 °C 2 years

### Packing

- 20 - 10 and 3,5kg plastic bucket.

### Safety Recommendations

- S2: Keep out the reach of children.
- S24/25: Avoid contact with eyes and skin.
- S26: In case of contact with eyes immediately wash with water and contact with a doctor.
- S28: In case of contact with skin immediately wash with water.
- S29: Do not discharge into drains or water courses.
- S46: If swallowed, seek medical advice immediately and show the container or label. Mix before using. Close the cover after using. Protect from frost and direct sunlight.

### Quality Certificate

- TS 5808  
Public exposure No. 04.524/604.506/E3

