

GOLD IZOLAN



Application Recommendations

Application Areas

- In interior, used in new ceilings prepared in accordance such as mortar, concrete, cement, boards, gypsum panelsurfaces.

Equipment



Fillers



Gypsum Undercoat



Acrylic Putty



Gold Izolan

Equipment



Scraper



Gypsum trowel



Puttyshovel



Spatula



Trowel



Dust Cloth



Brush



Mixer



Adjustable Stick




Paint Bucket


Surface Preparation



Mortar



Concrete




Cement Board




Gypsum Panels

- Gold Izolan applicable cleaned every dirt, oil,dry and solid of the swollen layers.Can obtain maximum benefit from the Gold Izolan, must be removed from accordance mortar, raw concrete, cement gypsum board and made ceiling paint, dirt, dust and adhesion surfaces. Should be cleaned worm, swollen, completely perforated plate of paints.
- If there is not particular a new object to be painted like grain mortar,concrete,cement must be smoothed with satin plaster
- If necessary, surface cracks should be filled with putty and defects should be corrected.
- Should be cleaned old painted moldy surfaces on the wall before application with damp cloth. Thoroughly with emery paper,the surface must be removed. If soot and mold drying preemptive 2-3 coats should be applied.

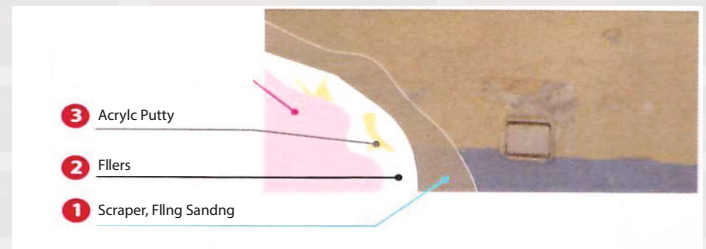

Application



During application and during the subsequent 24 hours at the ambient temperature of the surface should be +5 C.



Before application Gold Izolan should be mixed.



Gold Izolan thinned with clean water 10% and application for two layer by brush, roller or spray.



Should be waited minimum 6 hours between layers.

After Application

Application tools should be washed with water after use immediately.

GOLD IZOLAN

BEKOTAŞ
Boya

Interior

Water

Product Code: 105

Product Description

- ◆ It is acrylic based, insulated and transparent interior undercoat.

Application Areas

- ◆ In interior, prepared in accordance mortar, concrete, cement, boards, gypsum panel surfaces such as
- ◆ Old painted surfaces.

Advantages

- ◆ Lining of insulated, due to the nature of penetration by penetrating deep into the interior of the application rests on the surface of the paint layer by integrating application surface and creates a solid foundation.
- ◆ High water vapor permeability
- ◆ Does not harm health of environment and not smell because solvent free and diluted with water.



Matt



Spray Pistle

Technical specifications:

Structure

- ◆ Acrylic emulsion based, water based

Diluting

- ◆ Water

Appearance on the packing

- ◆ Transparent, Unstable

Dry Appearance

- ◆ Smooth

Color

- ◆ Transparent

Water Vapor permeability

- ◆ SD (m) (TS EN ISO 7783-2): approximately: 150

Drying Time

- ◆ (between +5 +35 °C) starting time to las layer is 6 hours. Lower temperature or high relative humidity lengthens the drying time.

Coverage

- ◆ Depending on the surface smoothness, absorbency and diluting approximately 27-44 m²/lt. per a layer.

Shelf Life

- ◆ In package and in 5-35 °C 2 years

Packing

- ◆ 15-7,5-2,5 lt plastic bucket.

Safety Recommendations

- ◆ S2: Keep out the reach of children.
- ◆ S24/25: Avoid contact with eyes and skin.
- ◆ S26: In case of contact with eyes immediately wash with water and contact with a doctor.
- ◆ S28: In case of contact with skin immediately wash with water.
- ◆ S29: Do not discharge into drains or water courses.
- ◆ S46: If swallowed, seek medical advice immediately and show the container or label. Mix before using. Close the cover after using. Protect from frost and direct sunlight.



Quality Certificate

- ◆ TSE TS 5808
Public exposure No. 04.524/604.506/E3