

# GOLD INTERIOR PUTTY



Interior

Water

## Application Recommendations

### Application Areas

- Is used conventional concrete, mortar, exposed concrete, chipboard, aerated concrete.

## Equipment



Fillers



Gypsum Undercoat



Gold Interior Putty

## Equipment



Scraper



Gypsum trowel



Putty shovel



Spatula



Trowel



Dust Cloth



Brush



Mixer



Adjustable Stick




Paint Bucket


## Surface Preparation



Mortar



Concrete



Cement Board



Gypsum Panels



Old Plastic Paint



Plaster Board




Glasstextile




Wallpaper

- Gold Interior Paste applicable cleaned every dirt, oil, dry and solid of the swollen layers. Can obtain maximum benefit from the Gold Interior Paste must be removed from accordance mortar, raw concrete, cement gypsum board and made ceiling paint, dirt, dust and adhesion surfaces. Should be cleaned worm, swollen, completely perforated plate of paints.
- If there is not particular a new object to be painted like grain mortar, concrete, cement must be smoothed with satin plaster.
- Surface cracks should be filled with putty and defects should be corrected.

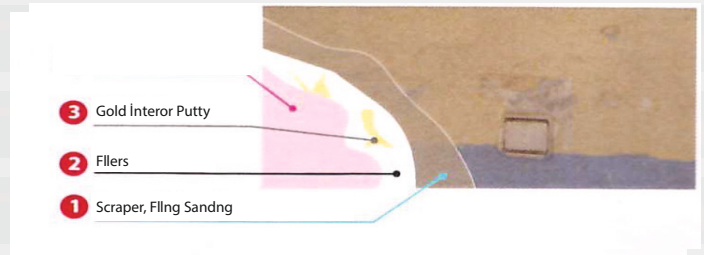

## Application



During application and during the subsequent 24 hours at the ambient temperature of the surface should be +5 ° C.



Before application Gold Interior Paste should be mixed.



Gold Interior Paste thinned with clean water 10% and application for two layer by brush, roller or spray.



Should be waited minimum 6 hours between layers.

## After Application

Application tools should be washed with water after use immediately.

# GOLD INTERIOR Putty



Interior

Water

Product Code: 140

## Product Description

- It is an acrylic based paste.

## Application Areas

- Is used on conventional concrete, mortar, exposed concrete, chipboard, aerated concrete.

## Advantages

- Gold Interior Paste; due to the nature of the substrate to penetrate deeps into the interior of the next layer of paint on the application surface and creates a solid foundation by integrating.
- It is excellent water vapor permeability.
- Does not harm health of environment and not smell because solvent free and diluted with water



Matt Putty Showel

## Technical specifications:

### Structure

- Acrylic emulsion based, water based

### Diluting

- Water

### Appearance on the packing

- Dark, Stable, Jelly

### Dry Appearance

- Matt, Pastel, Smooth

### Color

- White

### Water Vapor permeability

- SD (m) (TS EN ISO 7783-2): approximately: 150

### Drying Time

- (between +5 +35 °C) starting time to last layer is 6 hours. Lower temperature or high relative humidity lengthens the drying time.

### Coverage

- Depending on the surface smoothness and absorbency also application thickness approximately 2-3 m<sup>2</sup>/lt.



### Shelf Life

- In package and in 5-35 °C 2 years

### Packing

- 20 kg plastic bucket.

### Safety Recommendations

- S2: Keep out the reach of children. S24/25: Avoid contact with eyes and skin. S26: In case of contact with eyes immediately wash with water and contact with a doctor. S28: In case of contact with skin immediately wash with water. S29: Do not discharge into drains or water courses. S46: If swallowed, seek medical advice immediately and show the container or label. Mix before using. Close the cover after using. Protect from frost and direct sunlight.

### Quality Certificate

- TSE K 276  
Public exposure No. 04.524/604.506/E3