

GOLD SATIN Gypsum Liner



Application Recommendations

Application Areas

- In interior, can be used on surfaces such as mortar, concrete, cement, boards, gypsum panel prepared in accordance.

Equipment



Fillers



Acrylic Putty



Gold Interior Undercoat

Equipment



Scraper



Gypsum trowel



Putty shovel



Spatula



Trowel



Dust Cloth



Brush



Mixer



Adjustable Stick




Paint Bucket


Surface Preparation



Mortar



Concrete




Cement Board




Gypsum Panels

- Gold Satin Gypsum Liner applicable cleaned every dirt, oil, dry and solid of the swollen layers. Can obtain maximum benefit from the Gold Satin Gypsum Liner, must be removed from accordance mortar, raw concrete, cement gypsum board and made ceiling paint, dirt, dust and adhesion surfaces. Should be cleaned worm, swollen, completely perforated plate of paints.
- If there is not particular a new object to be painted like grain mortar, concrete, cement must be smoothed with satin plaster.
- If necessary, surface cracks should be filled with putty and defects should be corrected.
- Should be cleaned old painted moldy surfaces on the wall before application with damp cloth. Thoroughly with emery paper, the surface must be removed. If soot and mold drying preemptive 2-3 coats should be applied.

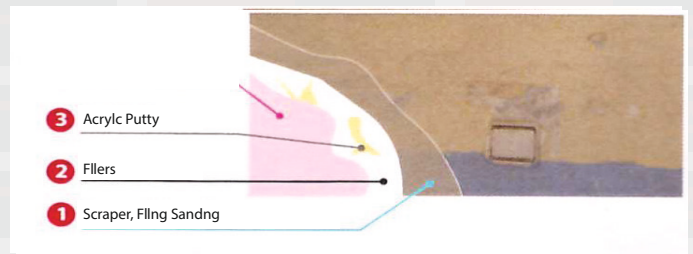

Application



During application and during the subsequent 24 hours at the ambient temperature of the surface should be +5 ° C.



Before application Gold Satin Gypsum Liner should be mixed.



Gold Satin Gypsum Liner thinned with clean water 10% and application for two layer by brush, roller or spray.



Should be waited minimum 6 hours between layers.

After Application

Application tools should be washed with water after use immediately.

GOLD SATIN Gypsum Liner



Interior

Water

Product Code: 115

Product Description

- ◆ Satin gypsum undercoat; acrylic copolymer based, transparent interior primer.

Application Areas

- ◆ Used as application before topcoat, corrected with putty surfaces, emulsion based on previously painted surfaces, very absorbent and dust on surfaces that will be painted for the first time.

Advantages

- ◆ Satin Gypsum Undercoat penetration due to the nature of the substrate to penetrate deep into the interior of the next layer of paint on the application surface and creates a solid foundation by integrating.
- ◆ It is excellent water vapor permeability.
- ◆ Does not harm health of environment and not smell because solvent free and diluted with water.



Matt



Brush



Roll



Spray Pistole

Technical specifications:

Structure

- ◆ Acrylic emulsion based, water based

Diluting

- ◆ Water

Appearance on the packing

- ◆ Dark, consistent

Dry Appearance

- ◆ Thin, Unstable, Transparent

Color

- ◆ Transparent

Water Vapor permeability

- ◆ SD (m) (TS EN ISO 7783-2): approximately: 75

Drying Time

- ◆ (between +5 +35 °C) starting time to last layer is 6 hours. Lower temperature or high relative humidity lengthens the drying time.

Coverage

- ◆ Depending on the surface smoothness and absorbency approximately 11-13 m²/lt. per a layer.



Shelf Life

- ◆ In package and in 5-35 °C 2 years

Packing

- ◆ 15 lt plastic bucket.

Safety Recommendations

- ◆ S2: Keep out of the reach of children.
- ◆ S24/25: Avoid contact with eyes and skin.
- ◆ S26: In case of contact with eyes immediately wash with water and contact with a doctor.
- ◆ S28: In case of contact with skin immediately wash with water.
- ◆ S29: Do not discharge into drains or water courses.
- ◆ S46: If swallowed, seek medical advice immediately and show the container or label.
- ◆ Mix before using. Close the cover after using.
- ◆ Protect from frost and direct sunlight.

Quality Certificate

- ◆ TSE TS 5808
Public exposure No. 04.524/604.506/E3