

GOLD DECORATIVE GOLD LEAF (VARAK) EFFECT PAINT



Interior
Wall



Application Recommendations

Application Areas

• It is used interior areas to create an authentic and antique effect in luxury construction, commercial and industrial building on flat painted surfaces, textured surfaces and in many wall surfaces covered with similar products.

Equipment



Fillers

Gypsum
Undercoat

Acrylic Putty

Interior
Undercoat

Decorative
Effect Paint

Equipment



Scraper

Gypsum trowel

Putty shovel

Spatula

Trowel

Dust Cloth

Brush

Mixer

Decor Roller

Sponge

Effects Stamp

Surface Preparation



Mortar

Concrete

Cement Board

Gypsum Panels

Old Plastic Paint

Plaster Board

Glasstextile

Wallpaper

• Gold Decorative Gold Leaf (Varak) Effect Paint applicable cleaned every dirt, oil, dry and solid of the swollen layers. Can obtain maximum benefit from the Gold Decorative Gold Leaf (Varak) Effect Paint, must be removed from accordance mortar, raw concrete, cement, gypsum board and made ceiling paint, dirt, dust and adhesion surfaces. Should be cleaned worm, swollen, completely perforated plate of paints.


• If there is not particular a new object to be painted like grain mortar, concrete, cement must be smoothed with satin plaster.

• If necessary, surface cracks should be filled with putty and defects should be corrected.


• Should be cleaned old painted moldy surfaces on the wall before application with damp cloth. Thoroughly with emery paper, the surface must be removed. If soot and mold drying preemptive 2-3

coats should be applied.

• Is recommended in order to benefit from the better brightness from the Gold Decorative Gold Leaf (Varak) Effect Paint use Gold Brightness Satin Paint before Gold Decorative Metallic Sedef Effect Paint.

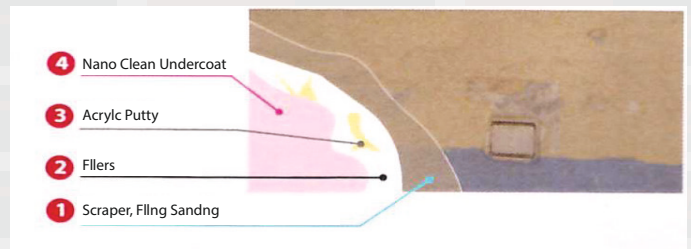

Application



During application and during the subsequent 24 hours at the ambient temperature of the surface should be +5 C.



Before application Gold Decorative Gold Leaf (Varak) Effect Paint should be mixed.



Gold Decorative Gold Leaf (Varak) Effect Paint thinned with clean water 10% and application for two layer by brush, roller or spray.



Should be waited minimum 6 hours between layers.

After Application

Application tools should be washed with water after use immediately.

GOLD DECORATIVE GOLD LEAF (VARAK) EFFECT PAINT



Interior

Water

Product Code 78

Product Description


- ◆ Acrylic copolymer emulsion based, gloss, semi opaque and gold looking decorative last layer interior and exterior decorative paint.

Application Areas

- ◆ In the interiors of buildings, all kinds of wall surfaces.

Advantages

- ◆ Showing resistance to mold and fungus; provides relief especially for asthmatics.
- ◆ .Application is easy
- ◆ Give attractive effect on the surface.
- ◆ Resistant to water
- ◆ Has a decorative feature.
- ◆ Does not harm health of environment and not smell because solvent free and diluted with water.



Technical specifications:

Structure

- ◆ Acrylic emulsion based

Diluting

- ◆ Water

Appearance on the packing

- ◆ Dark, consistent

Dry Appearance

- ◆

Color

- ◆

Brightness

- ◆ (60) (ISO 2813): approximately 7

Water Vapor permeability

- ◆ SD (m) (TS EN ISO 7783-2)
Approximately 0,250

Scrub Resistance

- ◆

Density

- ◆

Dry Extract

- ◆

Drying Time

- ◆ Drying time 6 hours for 2 layer.
Fuldry 24 hours.
Lower temperature and higher relative humidity will lengthen drying time.

Coverage

- ◆ Depending on the surface smoothness and absorbency approximately 7-10 m²/lt. per a layer.

Shelf Life

- ◆ 2 year for 5°-35 C on packing

Packing

- ◆ 15-7,5-2,5 kg plastic bucket.

Safety Recommendations

- ◆ S2 Keep out thereach of children.
 - ◆ S24 / 25 AVOID contact with eyes and skin.
 - ◆ S26 In case of contact with eyes immediately wash with water and contact with doctor.
 - ◆ S28 In case of contact with skin, immediately wash with water.
 - ◆ S29 Do not discharge into drains or water courses.
 - ◆ S46 If swallowed, seek medical advice immediately.
- Mixing before using

Quality Certificate

- ◆ TSE TS 5808
Public-exposure No. 04.524/604.506/E3

