

GOLD READY PLASTER (TERASIT)



Application Recommendations

Application Areas

- Can be used facade of office, home, workplace home a lot of time passed exterior of space.
- Can use in public areas such as stores, markets, complex with covering and property degradation on surface.
- Provide a decorative appearance in desired place all kinds of interior and exterior place especially building's interiors fences and landscaping.

- Using structural elements for decorative purpose and protection on plaster, brick, concrete, concrete panel, interior and exterior surface.

Equipment



Fillers



Gypsum Undercoat



Acrylic Putty



Exterior Undercoat



Gold Ready Plaster Terasit

Equipment



Scraper



Gypsum trowel



Putty shovel



Spatula



Trowel



Dust Cloth



Brush



Mixer



Adjustable Stick



Paint Bucket



Sprayer

Surface Preparation



Mortar



Concrete



Cement Board



Gypsum Panels



Old Plastic Paint



Plaster Board



Glasstextile



Wallpaper

• Gold Ready plaster applicable cleaned every dirt, oil, dry and solid of the swollen layers. Can obtain maximum benefit from the Gold Ready plaster, must be removed from accordance mortar, raw concrete, cement gypsum board and made ceiling paint, dirt, dust and adhesion surfaces. Should be cleaned worm, swollen, completely perforated plate of paints.


• Is recommended material to be applied in the appropriate color to be primed with Gold Acrylic Undercoat. pattern polishing is done with a plastic trowel. In case of loss of water during application of the material for various reasons, clean water is added until the desired consistency.

4 Nano Clean Undercoat

3 Acrylic Putty

2 Fillers

1 Scraper, Fllng Sandng

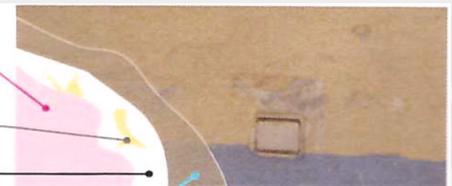

Application




During application and during the subsequent 24 hours at the ambient temperature of the surface should be +5 ° C.



Before application Gold Ready Plaster should be mixed.



Gold Ready Plaster thinned with clean water 10% and application for two layer by brush, roller or spray.



Should be waited minimum 6 hours between layers.

After Application

Application tools should be washed with water after use immediately.

GOLD READY PLASTER (TERASIT)



Exterior

Interior

Water

Product Code: 205

Product Description

Gold Ready Plaster acrylic emulsion based. It is used in exterior facade, water resistant, breathable, decorative appearance. Protects wall from moisture. Does not fall from applied surface. Does not crack, color fade, application is easy, economical, water-based, ecological and easy to

Application Areas

Gold Ready Plaster is applied to exterior or facade. Surface should be prepared before when applying on raw plaster, lime and powder coated surfaces.

Advantages

- Does not crack and crumble applied to surface. color does not fade, application is easy, it is economical.
- Gives pattern features.
- Resistant to water.
- Allows the building to breathe with ability to throw inside the resulting humidity.



Matt

Puttyshovel

Technical specifications:

Structure

Acrylic emulsion based, water based

Diluting

Water

Appearance on the packing

Dark, Stable, Jelly

Dry Appearance

Matt, Pastel, Rough

Color

In stock white. Custom manufacturing for any orders.

Water Vapor permeability

SD (m) (TS EN ISO 7783-2):
Approximately: 100

Drying Time

(between +5 +35 °C) complete drying time is 24 hours. Ossification time is one week. Lower temperature or high relative humidity lengthens the drying time.

Coverage

Depending on the surface smoothness, absorbency and micron thickness approximately
1mm: 0,80 m²/lt. 1,5mm:
0,70 m²/lt. 2,5mm: 0,5 m²/lt.

Shelf Life

In package and in 5-35 °C 2 years

Packing

25 kg plastic bucket.

Safety Recommendations

- S2: Keep out of the reach of children.
 - S24/25: Avoid contact with eyes and skin.
 - S26: In case of contact with eyes immediately wash with water and contact with a doctor.
 - S28: In case of contact with skin immediately wash with water.
 - S29: Do not discharge into drains or water courses.
 - S46: If swallowed, seek medical advice immediately and show the container or label.
- Mix before using. Close the cover after using. Protect from frost and direct sunlight.

Quality Certificate

- TS 5808
Public exposure No. 04.524/604.506/E3

