

Gold Antibacterial Izolan



Interior Wall

Water

Application Recommendations

Application Areas

- In interior, used in new ceilings prepared in accordance such as mortar, concrete, cement, boards, gypsum panel surfaces.

Equipment



Fillers



Gypsum Undercoat



Acrylic Putty



Gold Antibacterial Izolan

Equipment



Scraper



Gypsum trowel



Putty shovel



Spatula



Trowel



Dust Cloth



Brush



Mixer



Adjustable Stick




Paint Bucket

Surface Preparation



Mortar



Concrete




Cement Board



Gypsum Panels

- Bekotaş Gold Antibacterial Izolan applicable cleaned every dirt, oil, dry and solid of the swollen layers. Can obtain maximum benefit from the Gold Antibacterial Izolan, must be removed from accordance mortar, raw concrete, cement gypsum board and made ceiling paint, dirt, dust and adhesion surfaces. Should be cleaned worm, swollen, completely perforated plate of paints.
- If there is not particular a new object to be painted like grain mortar, concrete, cement must be smoothed with satin plaster
- If necessary, surface cracks should be filled with putty and defects should be corrected.
- Should be cleaned old painted moldy surfaces on the wall before application with damp cloth. Thoroughly with emery paper, the surface must be removed. If soot and mold drying preemptive 2-3 coats should be applied.

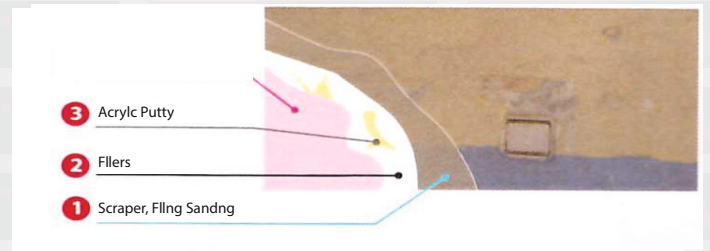

Application



During application and during the subsequent 24 hours at the ambient temperature of the surface should be +5 ° C.



Before application Gold Antibacterial Izolan should be mixed.



Gold Antibacterial Izolan thinned with clean water 10% and application for two layer by brush, roller or spray.



Should be waited minimum 6 hours between layers.

After Application

Application tools should be washed with water after use immediately.

Gold Antibacterial Izolan



Interior

Water

Product Code: 106

Product Description

- ◆ It is transparent, insulated and acrylic based interior undercoat.

Application Areas

- ◆ Corrected with putty surfaces, emulsion based on previously painted surfaces are highly absorbent and dust on surfaces that will be painted for the first time is used as a primer before topcoat application.

Advantages

- ◆ Lining of insulated, due to the nature of penetration by penetrating deep into the interior of the application rests on the surface of the paint layer by integrating application surface and creates a solid foundation.
- ◆ High water vapor permeability
- ◆ Does not harm health of environment and not smell because solvent free and diluted with water.



Pistole



Roll

Technical specifications:

Structure

- ◆ Acrylic emulsion based

Diluting

- ◆ Water

Appearance on the packing

- ◆ Dark, consistent

Dry Appearance

- ◆

Color

- ◆

Brightness

- ◆ (60) (ISO 2813): approximately 7

Water Vapor permeability

- ◆ SD (m) (TS EN ISO 7783-2) Approximately 0,250

Scrub Resistance

- ◆

Density

- ◆

Dry Extract

- ◆

Drying Time

- ◆ Drying time 6 hours for 2 layer. Fuldry 24 hours. Lower temperature and higher relative humidity will lengthen drying time.

Coverage

- ◆ Depending on the surface smoothness, absorbency and diluting approximately 27-44 m²/lt. per a layer.

Shelf Life

- ◆ 2 year for 5-35 C on packing

Packing

- ◆ 15-7,5-2,5 lt plastic bucket.

Safety Recommendations

- ◆ S2: Keep out the reach of children. S24/25: Avoid contact with eyes and skin. S26: In case of contact with eyes immediately wash with water and contact with a doctor. S28: In case of contact with skin immediately wash with water. S29: Do not discharge into drains or water courses. S46: If swallowed, seek medical advice immediately and show the container or label. Mix before using. Close the cover after using.
- ◆ Protect from frost and direct sunlight.

Quality Certificate

- ◆ TSE TS 5808
Public exposure No. 04.524/604.506/E3

