

GOLD Spray Paint



Application Recommendations

Application Areas

- In interior, used in new ceilings prepared in accordance such as mortar, concrete, cement, boards, gypsum panel surfaces.


Equipment




Equipment




Surface Preparation

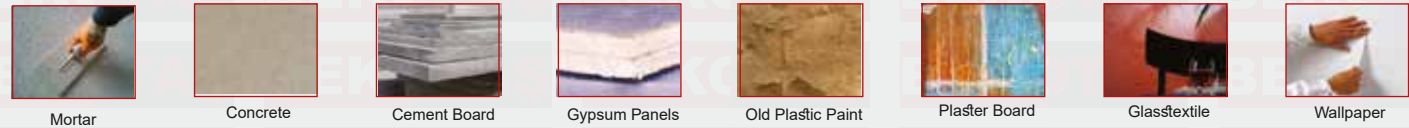

- Bekotaş Spray Paint (Fasarit) applicable cleaned from dirt, oil, dry and solid of the swollen layers. Can obtain maximum benefit from the Bekotaş Spray Paint (Fasarit), must be removed from accordance mortar, raw concrete, cement gypsum board and made ceiling paint, dirt, dust and adhesion surfaces. Should be cleaned worm, swollen, completely perforated plate of paints.
- If there is not particular a new object to be painted like grain mortar, concrete, cement must be smoothed with satin plaster. If necessary, surface cracks should be filled with putty and defects should be corrected.
- Best way to take advantage from Bekotaş Spray Paint (Fasarit) after making all surfaces smooth to apply. Bekotaş Spray Paint (Fasarit) will reduce consumption and ensure good adhesion.
- Should be cleaned old painted moldy surfaces on the wall before application with damp cloth. Thoroughly with emery paper, the surface must be removed. If soot and mold drying preemptive 2-3 coats should be applied.

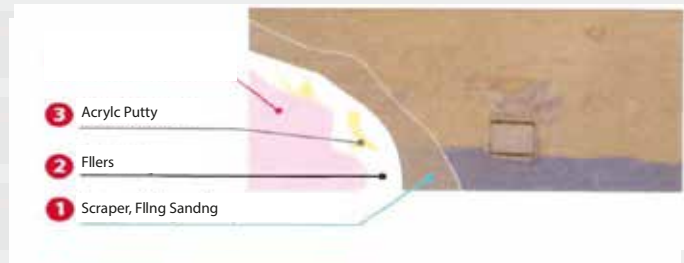

Application



During application and during the subsequent 24 hours at the ambient temperature of the surface should be +5 C.



Before application Bekotaş Spray Paint should be mixed.



Bekotaş Spray Paint thinned with clean water 10% and application for two layer by brush, roller or spray.



Should be waited minimum 6 hours between layers.

After Application

Application tools should be washed with water after use immediately.

GOLD SPRAY PAINT



Interior

Water

Product Code: 100

Product Description

- ◆ Fasarit; applied by spray on the interior surface; giving decorative appearance to ceiling and wall.

Application Areas

- ◆ In interior, used in new ceilings prepared in accordance such as mortar, concrete, cement, boards, gypsum panel surfaces.
- ◆ Old painted surfaces.

Advantages

- ◆ Plaster debugged and renewal of old surface is the most economical solution.
- ◆ Special equipment is very quick and easy to apply with a spray; labor and time savings.
- ◆ Repainted on the decorative appearance deteriorate.
- ◆ Showing resistance to mold and fungus; provides relief especially for asthmatics.
- ◆ High water vapor permeability
- ◆ Does not harm health of environment and not smell because solvent free and diluted with water.



Matt



Spray Pistolet

Technical specifications:

Structure

- ◆ Acrylic emulsion based, water based

Diluting

- ◆ Water

Appearance on the packing

- ◆ Dark, Stable, Jelly

Dry Appearance

- ◆ Matt, Pastel, Smooth

Color

- ◆ White

Water Vapor permeability

- ◆ SD (m) (TS EN ISO 7783-2) Approximately 0,250

Drying Time

- ◆ (between +5 +35 °C) starting time to second layer is 6 hours, completely drying time 24 hours. Ossification time is one week. Lower temperature and high relative humidity extends the drying time.

Coverage

- ◆ Depending on the surface smoothness, absorbency, crack depth and pattern size approximately 1,5 - 2 m²/lt.

Shelf Life

- ◆ In package and in 5-35 °C 2 years

Packing

- ◆ 25 kg plastic bucket.

Safety Recommendations

- ◆ S2: Keep out the reach of children.
- ◆ S24/25: Avoid contact with eyes and skin.
- ◆ S26: In case of contact with eyes immediately wash with water and contact with a doctor.
- ◆ S28: In case of contact with skin immediately wash with water.
- ◆ S29: Do not discharge into drains or water courses.
- ◆ S46: If swallowed, seek medical advice immediately and show the container or label. Mix before using. Close the cover after using. Protect from frost and direct sunlight.

Quality Certificate

- ◆ TS 5808
Public exposure No. 04.524/604.506/E3

