

PRESTIGE PURE ACRYLIC SILICONE EXTERIOR FACADE PAINT



Application Recommendations

Application Areas

- It is applied prepared accordance to such as mortar, concrete, cement and minerals new walls and old painted walls.
- Prestige pure acrylic silicone exterior paint is a 40-60 degree durable exterior paint resistant to solar UV rays, especially in regions with hot climate.

Equipment



Fillers



Gypsum Undercoat



Acrylic Putty



Exterior Undercoat



PRESTIGE PURE ACRYLIC SILICONE EXTERIOR FACADE PAINT

Equipment



Scraper



Gypsumtrowel



Puttyshovel



Spatula



Trowel



Dust Cloth



Brush



Mixer



Adjustable Stick



Paint Bucket




Sprayer

Surface Preparation



Mortar



Concrete



Cement Board



Gypsum Panels



Old Plastic Paint



Plaster Board



Glasstextile



Wallpaper


•Gold Prestij Acrylic Exterior Paint applicable cleaned every dirt, oil, dry and solid of the swollen layers.Can obtain maximum benefit from the Gold Prestij Acrylic Exterior Paint, must be removed from accordance mortar, raw concrete, cement gypsum board and made ceiling paint, dirt, dust and adhesion surfaces. Should be cleaned worm, swollen, completely perforated plate of paints.

•If there is not particular a new object to be painted like grain mortar,concrete,cement must be smoothed with satin plaster.


•If necessary, surface cracks shold be filled with putty and defects should be corrected.

•Best way to take advantage from Gold Prestij Acrylic Exterior Paint after making all surfaces smooth to apply. Nano Clean Interior Undercoat will reduce consumption and ensure good adhesion.

• Old painted moldly surfaces before application on the surface should be cleaned with damp cloth.Thoroughly with emery paper,t-he surface must be removed. If soot and mold drying preemptive 2-3 coats should be applied.

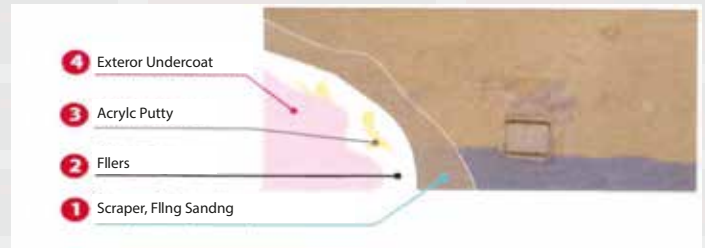

Application



During application and during the subsequent 24 hours at the ambient temperature of the surface should be +5 ° C.



Before application Gold Prestij Acrylic Exterior Paint should be mixed.



Gold Prestij Acrylic Exterior Paint thinned with clean water 10% and application for two layer by brush, roller or spray.



Should be waited minimum 6 hours between layers.

After Application

Application tools should be washed with water after use immediately.

PRESTIGE PURE ACRYLIC SILICONE EXTERIOR FACADE PAINT



Exterior

Water

Product Code: 161

Product Description

- It is decorative exterior paint with silicone; acrylic emulsion based and resistant to mildew and algae.

Application Areas

- It is applied prepared accordance to such as mortar, concrete, cement and minerals new walls and old painted walls.
- Old painted surfaces.

Advantages

- Photocatalyst are activated by light and destroy harmful substance and odors.
- Showing resistance to mold and fungus; provides relief especially for asthmatics.
- Easily cleaned, indelible and has superior cover power.
- Because of contain silicone pushes the water rain and to slide away without wetting the surface of the rain water hitting the front.
- With high water vapor permeability allows the building to breathe thrown out of steam.
- Not affected rain, snow, humidity, by severe weather conditions such as extreme cold or hot; not swell, crack and fade colors.
- Resistant to alkaline.
- Does not harm health of environment and not smell because solvent free and diluted with water.



Matt



Brush



Roll



Spray Pistolet

Technical specifications:

Structure

- Acrylic emulsion based, water based

Diluting

- Water

Appearance on the packing

- Dark, Stable, Jelly

Dry Appearance

- Matt, P astel, Smooth

Color

- In stock white. Custom manufacturing for any orders.

Water. Vapor permeability

- SD (m) (TS EN ISO 7783-2): approximately: 150

Drying Time

- (between +5 +35 °C) starting time to second layer is 6 hours, completely drying time 24 hours. Ossication time is one week. Lower temperature and high relative humidity extends the drying time.

Coverage

- Depending on the surface smoothness and absorbency approximately 8-10 m²/lt. per a layer



Shelf Life

- In pack age and in 5-35 °C 2 years

Packing

- 20 - 10 and 3,5kg plastic bucket

Safety Recommendations

- S2: Keep out the reach of children.
- S24/25: Avoid contact with eyes and skin.
- S26: In case of contact with eyes immediately wash with water and contact with a doctor
- S28: In case of contact with skin immediately wash with water
- S29: Do not discharge into drains or water courses.
- S46: If swallowed, seek medical advice immediately and show the container or label. Mix before using
- Close the cover after using
- Protect from frost and direct sunlight.

Quality Certificate

- TS 7847
Public exposure No. 04.524/604.506/E3